




# KT-LED54HID-EX39-840-D/G2

HID REPLACEMENT LED LAMP

# **DESCRIPTION**

54W HID Replacement LED Lamp | 4000K | >80 CRI | IP64 Rated

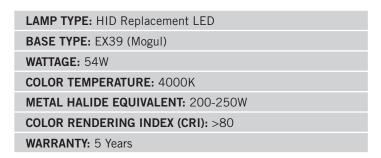



#### PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable: Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed
- DLC Listed

- Operating Temperature: -29°C/-20°F to 60°C/140°F
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 4kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Suitable for Use in Fully Enclosed Fixture

## **OPERATING SPECIFICATIONS**

#### **ELECTRICAL CHARACTERISTICS**

Input Voltage	Power Consumption	Power Factor	Input Current
120-277Vac	54W	>0.9	0.45A @ 120V 0.20A @ 277V


# **RATED LIFE**

L70 (Hours)	50,000


#### PHOTOMETRIC CHARACTERISTICS

Color Temperature (CCT)	4000K	
Luminous Flux	7884 lm	
Color Rendering Index (CRI)	>80	
Efficacy	146 lm/W	
Visible Light Area	360°	

#### SPECTRAL DISTRIBUTION

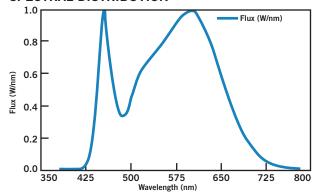

#### **LUX DISTANCE CURVE**

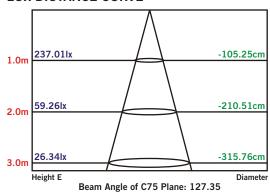





# KT-LED54HID-EX39-840-D/G2

HID REPLACEMENT LED LAMP

#### WIRING DIAGRAM

#### STEP 1


**Disconnect power.** Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

#### STEP 2


Rewire for line voltage to the lamp socket.


#### STFP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.




# FIGURE 1 LOWAN BALLAST X EXAMPLE TO THE STATE OF THE ST





# PHYSICAL CHARACTERISTICS

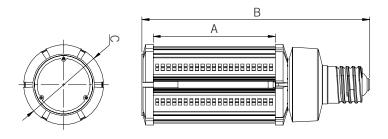

#### **LAMP DIMENSIONS**

A (Illuminated Length)	5.07"	
B (Body Length)	9.80"	
C (Diameter)	3.34"	

BASE TYPE: EX39 (Mogul)

## **ORDERING INFORMATION**

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED54HID-EX39-840-D /G2-DP	Distributor Pack (Individual Cartons)	12	Quick Ship

# **CATALOG NUMBER BREAKDOWN**

