

Steel T-Box for Suspended Ceiling Grids

Can be positioned on the ceiling grid at the cross of the T-rails or on the straight away. For use on premium/reveal edge ceiling tiles, the box height adjusts by removing the tabs with pliers.


FEATURES AND BENEFITS

- 30.5 cu. inch steel box includes Wire Grabber™ connector with braided drop wire for support
- Meets 2017 NEC, section 314.27 for fan and fixture boxes
- Uses include fans, fixtures, smoke and carbon monoxide detectors, security cameras, exit signs, and emergency lighting
- UL Listed for fans/fixtures up to 70 lbs

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FBS428SC	12782	Steel T-Box, For fans/fixtures up to 70 lbs	1	10	4.312	3.728	4.706



FBS428SC

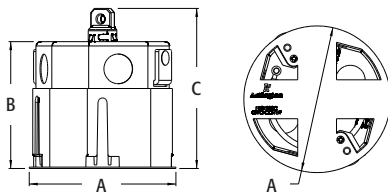

KIT INCLUDES...
 Wire Grabber™ with Braided Drop Wire Support Kit, (2) #10-32-32 x 4" screws, grid cover



INSTALLATION INSTRUCTIONS

- 1** Locate position of item to install.
 A = straight on T-bar rail
 B = intersection of T-bar rail (cross)
- 2** Cut out around ceiling tile.
 A = for straight
 B = for cross
- 3** Drop box onto grid from overhead.
 Remove tabs as necessary to adjust ceiling tile height.
- 4** Install fan, fixture or other item per manufacturer's instructions.
 Note: Install fan/fixture bracket with supplied screws.



Reinstall ceiling tiles. Install conduit with connector (not included). Install Wire Grabber connector. Attach drop wire to structural member.