


Incandescent Lamps

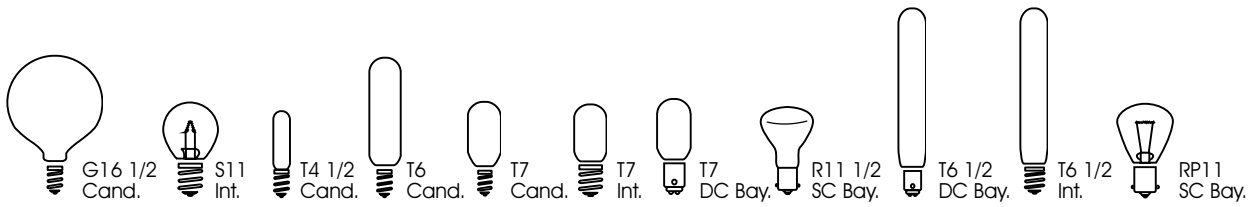

| Watts | Bulb | Base | Satco Product Number | Lamp Code | Volts | Finish | Master/Inner Carton | Pkg. Type | Flament | Avg. Rated Hours | Lumens | MOL | Notes | |
|---------|---------|---------|----------------------|--------------|--------|-------------------|---------------------|-----------|-----------|------------------|---------|--------|--------|--------|
| 15 | | Cand. | S3821 | 15G16 1/2 | 120 | Clear | 500/25 | Box | C-7A | 1500 | 114 | 3" | | |
| | | | S3726 | 15G16 1/2 | 120 | Clear | 120/10 | CD/2 | C-7A | 1500 | 114 | 3" | | |
| | | | A3921 | 15G16 1/2 | 130 | Clear | 500/25 | Box | C-7A | 2500 | 98 | 3" | | |
| | | | A3521 | 15G16 1/2 | 130 | Clear | 120/10 | CD/2 | C-7A | 2500 | 98 | 3" | | |
| | | | S3824 | 15G16 1/2/W | 120 | Sat. White | 500/25 | Box | C-7A | 1500 | 94 | 3" | | |
| | | | S3752 | 15G16 1/2/W | 120 | Sat. White | 120/10 | CD/2 | C-7A | 1500 | 94 | 3" | | |
| | | | A3924 | 15G16 1/2/W | 130 | Sat. White | 500/25 | Box | C-7A | 2500 | 83 | 3" | | |
| | | | A3524 | 15G16 1/2/W | 130 | Sat. White | 120/10 | CD/2 | C-7A | 2500 | 83 | 3" | | |
| | | | S3236 | 15G16 1/2/W | 120 | Gloss Wht | 500/25 | Box | C-7A | 1500 | 94 | 3" | | |
| | | | S11 | Int. | S3628 | 15S11/N | 115/125 | Clear | 600/10 | Box | C-7A | 1500 | 100 | 2 3/8" |
| T4 1/2 | Cand. | S3913 | 15T4 1/2/C | 130 | Clear | 10 | Sleeve/10 | C-7A | 1000 | 90 | 1 1/2" | 5 | | |
| T6 | Cand. | S3910 | 15T6 | 130 | Clear | 120/10 | Sleeve/10 | C-5A | 2500 | 95 | 3 1/16" | | | |
| | | S3912 | 15T6/145V | 145 | Clear | 120/10 | Sleeve/10 | C-5A | 2500 | 80 | 3 1/16" | | | |
| | | S3315 | 15T6/F | 120 | Frost | 500/25 | Sleeve | C-5A | 2500 | 90 | 4" | 5 | | |
| | | S3715 | 15T6/F | 120 | Frost | 72/6 | CD/2 | C-5A | 2500 | 90 | 4" | 5 | | |
| | | T7 | Cand. | S3905 | 15T7C | 130 | Clear | 120/10 | Sleeve/10 | C-5A | 2500 | 95 | 2 1/4" | |
| | | | | S4718 | 15T7C | 130 | Clear | 120/12 | CD/1 | C-5A | 2500 | 95 | 2 1/4" | |
| | | | Int. | S3911 | 15T7/N | 130 | Clear | 120/10 | Sleeve/10 | C-5A | 2500 | 95 | 2 1/4" | |
| | | | | S4722 | 15T7/N | 130 | Clear | 120/12 | CD/1 | C-5A | 2500 | 95 | 2 1/4" | |
| DC Bay. | S3906 | 15T7/DC | 130 | Clear | 120/10 | Sleeve/10 | C-5A | 2500 | 95 | 2 1/4" | | | | |
| | S4719 | 15T7/DC | 130 | Clear | 120/12 | CD/1 | C-5A | 2500 | 95 | 2 1/4" | | | | |
| 20 | R11 1/2 | SC Bay | S1383 | 1383 | 12-13 | Frosted | 600/10 | Box | C-6 | 600 | 200 | 2 1/2" | | |
| | | | S3618 | 1383/TF | 12-13 | Frst / ShatterPrf | 10 | Box | C-6 | 600 | 200 | 2 1/2" | 4 | |
| | T6 1/2 | DC Bay | S3297 | 20T6 1/2DC | 130 | Clear | 500/25 | Box | C-6 | 1500 | 150 | 5 3/8" | | |
| | | | S3298 | 20T6 1/2DC/F | 130 | Frosted | 500/25 | Box | C-6 | 1500 | 140 | 5 3/8" | | |
| | | Int. | S3280 | 20T6 1/2N | 130 | Clear | 500/25 | Box | C-6 | 1500 | 150 | 5 3/8" | | |
| | | | S3281 | 20T6 1/2N/F | 130 | Frosted | 500/25 | Box | C-6 | 1500 | 140 | 5 3/8" | | |
| 24 | RP11 | SC Bay | S3624 | 1133 | 6-8 | Clear | 600/10 | Box | C-6 | 300 | 400 | 2 1/4" | | |
| | | | S3724 | 1133 | 6-8 | Clear | 240/20 | CD/2 | C-6 | 300 | 400 | 2 1/4" | | |

Incandescent lamps

Visit our website at www.satco.com

When using a 130 Volt Lamp on a 120 Volt line, life is extended by approx. 2.5 times and lumens are reduced approx. 20%