

# STI STOPPER® STATION SERIES



## PRODUCT OVERVIEW

These ADA Compliant, multipurpose push button switches cover a wide range of applications both indoors and outdoors. They're called Stopper Stations. They incorporate a unique, patented design that helps dramatically to stop accidental activation. A number of standard models are available or we can create custom units to meet your needs exactly. You have your choice of any of five universal shell colors, several button styles, standard or custom wording and language.

## HOW THEY WORK

Because of their superior, patented design combined with quality construction throughout, you can expect outstanding performance for years to come. In fact, many STI customers are surprised to find that all this quality is available at no increase in price. Plus, customers appreciate the option to protect the switches with STI protective covers that carry a three year guarantee against breakage in normal use, one year on electro mechanical and electronic components. For indoor applications, you can order your Stopper Station with a pre-alarm cover to help stop malicious and accidental activation.

## KEY FEATURES

### General Information

- Multipurpose push button switches cover a wide range of applications both indoors and outdoors.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

### Design

- Unique, curved design helps protect against accidental activation.

### Construction

- Station housing molded of tough polycarbonate.
- UL Listed to U.S. and Canadian safety standards.
- Stainless steel backplate.
- Push buttons are ADA Compliant (excludes "3" key switch button).

### Installation

- 5VA flammability rating on backplate and spacer.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- Polycarbonate complies with FDA regulations for food contact applications.

### Options

- Your choice of colors — red, green, yellow, white or blue.
- Standard or custom text or hi-res logo.
- Custom text in any language.
- Protect with STI indoor/outdoor protective covers.



For more information, call 1-800-888-4784 (4STI) or visit [www.sti-usa.com](http://www.sti-usa.com)



**Safety Technology  
International, Inc.**

# STI Stopper® Station Series

## Dimensions and Technical Information

### UNIQUE BUTTON FEATURES

#### Models SS2xy0, SS2xy1, SS2xy3, SS2xy4

- Interchangeable or replaceable N.O. or N.C., SPST gold-plated contact blocks rated for 6 amps @ 600 VAC or 1 amp @ 250 VDC.
- Standard switch includes one N.O. and one N.C. contact. Holds up to three sets of isolated contacts.

**Note:** some standard single gang boxes need additional depth. To add 5/8" depth, order KIT-102722-color (B=blue, G=green, R=red, Y=yellow, W=white)


#### Models SS2xy2, SS2xy5, SS2xy9

- Two (2) Form "C" contacts, DPDT, rated 10 amps @ 125/250 VAC, 1/2 HP, 6 amps @ 30 VDC.

#### Models SS2xy8

- Switch rating 10 amps @ 240 VAC resistive and has a timer range: 2 - 60 seconds ( $\pm 15\%$ ).
- Indoor use only. Not recommended for outdoor/water applications, temperature range of button 15° to 120°F (-9° to +49°C).
- Timer life of over 1,000,000 operations.
- Pneumatic adjustable timer opens or closes a circuit and has a timed delay before reset. No electricity to operate.
- Ideal for security applications.
- 1 Form Z, 1 N.O. and 1 N.C. contact.

**\*Note:** x = color, y = cover, see page 4 for details.

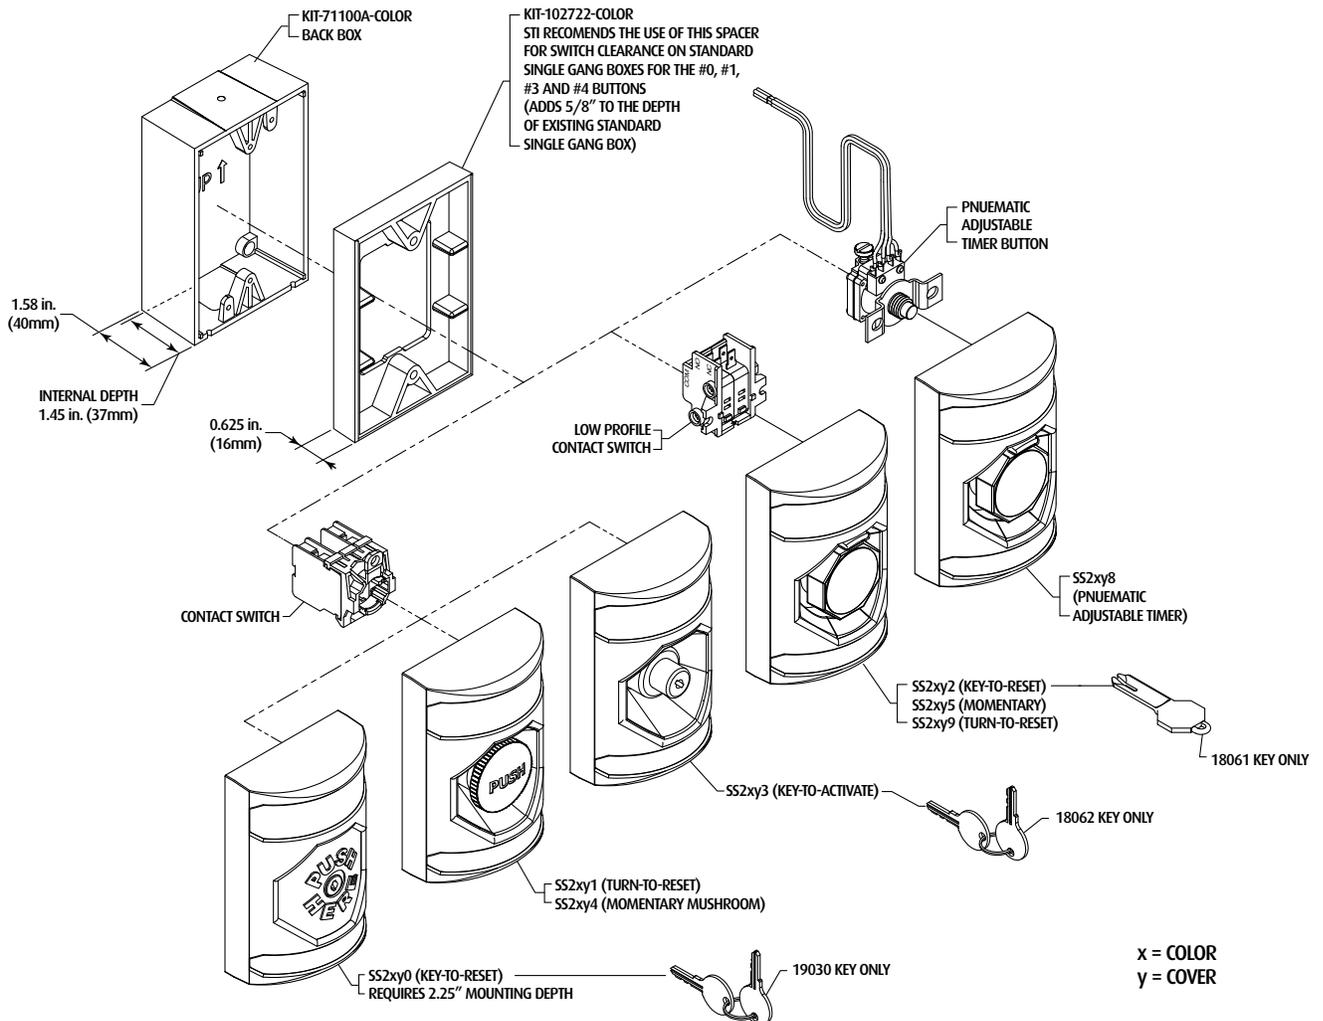

# STI Stopper® Station Series

## Dimensions and Technical Information

### APPROVALS & WARRANTY

#### TESTING

It has been tested and approved or listed by:

- Underwriter Laboratories and Canadian Underwriter Laboratories UL No. S7255. Complies with UL 2017. UL Listed for indoor and outdoor use ("8" button indoor only, temperature range 15° to 120°F). When mounting outdoor, must use an STI weather cover.
- ADA Compliant (excludes "3" button)

#### WARRANTY

Three year guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).


#### Accessories

<b>LT-1UL</b>	UL Latching/Timer Module
<b>KIT-71100A-Color</b>	Back box - Red, Green, Yellow, White and Blue for 2, 5, 8 and 9 switch
<b>KIT-E10196</b>	N.O. contact for 0, 1, 3 or 4 switch
<b>KIT-M10197H</b>	Replacement contact holder for 0, 1, 3 & 4 switch
<b>KIT-E10198</b>	N.C. contact for 0, 1, 3 or 4 switch
<b>KIT-71101A-Color</b>	Back box & Spacer Kit for 1, 3 or 4 switch in Red, Green, Yellow, White and Blue
<b>KIT-102722-Color</b>	Plastic Spacer - Red, Green, Yellow, White and Blue adds 5/8" depth
<b>KIT-H19030</b>	One Extra Key for 0 switch
<b>KIT-H18061</b>	One Extra Key for 2 switch
<b>KIT-H18062</b>	One Extra Key for 3 switch

#### "A" - Contact Depth

SS2xy0*	2.16"
SS2xy1	2.04"
SS2xy2	1.00"
SS2xy3*	2.13"
SS2xy4	2.04"
SS2xy5	1.00"
SS2xy8	1.4"
SS2xy9	1.00"

\* If extra depth needed in electrical box order KIT-102722-color.



Covers to protect your STI Stopper Station from damage or weather and to help stop malicious or accidental activation.



**Stopper® Station Shield**  
(Cover 2, A)

This inexpensive and highly durable cover, without alarm, was invented to mount directly onto the Stopper Station series of buttons with two tabs that snap into the Stopper Station shell. It takes hard knocks in stride while protecting the button against vandalism, damage and accidental activation. Ideal for use when space is limited. Cover available with sound, with sound and wireless or cover only.

No labeling can be placed on the Stopper Station shield.



**Universal Stopper®**  
(Covers 3, 4, 7, 8)

This indoor/outdoor cover helps stop false fire alarms and can protect Stopper Stations against damage as well as malicious or accidental activation. It consists of a clear polycarbonate shield that fits easily over any STI Stopper Station model. When it is lifted to gain access to the Stopper Station, the optional piercing 105 dB warning horn sounds. Legitimate activation is not affected. The protective cover options include: dome or low profile, with or without horn, flush mount, surface mount.


Additional labeling may be placed on the Universal Stopper.

#### Note:

Stopper Stations are approved for outdoor use with an outdoor rated protective cover. Excludes pneumatic buttons.

# STI Stopper® Station Series

Dimensions and Technical Information

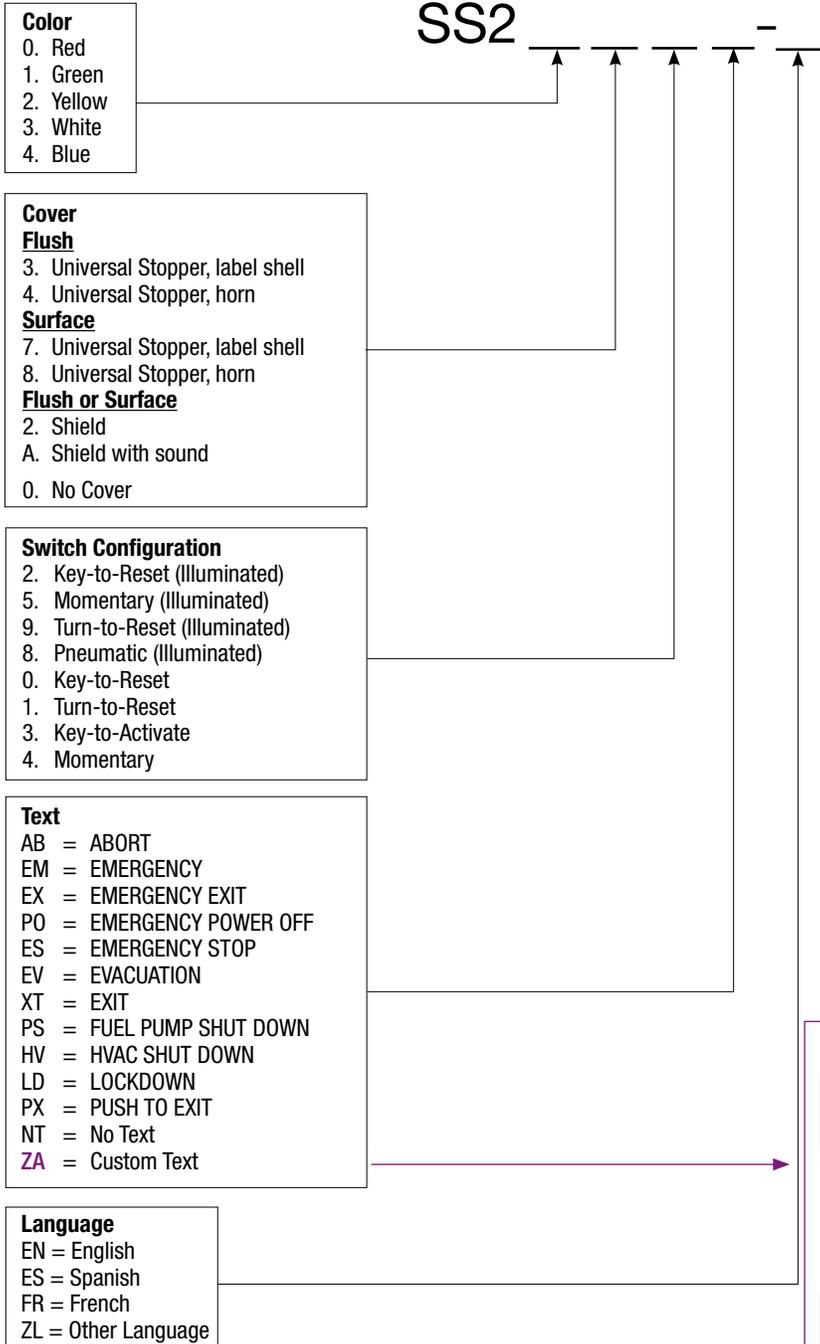

**CUSTOMIZE YOUR TEXT - text option ZA.**

CUSTOM TEXT FOR TOP OF SHELL: 1 LINE, 13 CHARACTERS MAXIMUM  
2 LINES, 20 CHARACTERS EACH (INCLUDES SPACES)


CUSTOM TEXT FOR BOTTOM OF SHELL: 1 LINE, 20 CHARACTERS MAXIMUM

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

CUSTOM TEXT COVER 3, 4, 7, 8: 2 LINES, 40 CHARACTERS EACH (INCLUDES SPACES)



Black text on white and yellow; white text on blue, red and green.



**Safety Technology International, Inc.**

2306 Airport Road  
Waterford, Michigan  
48327, USA

Tel: 248-673-9898  
Fax: 248-673-1246  
Toll-free: 800-888-4784  
info@sti-usa.com  
www.sti-usa.com

Taylor House  
34 Sherwood Road  
Bromsgrove, Worcestershire  
B60 3DR, England

Tel: +44 (0)1527 520 999  
Fax: +44 (0)1527 501 999  
info@sti-europe.com  
www.sti-europe.com