

## HS-150 Line Voltage Card Key Switch



# Installation Instructions

### SPECIFICATIONS

Voltage .....	120-277VAC, 50/60Hz
Power Consumption.....	Maximum 2.1 Watts
Load Rating	
@120 VAC.....	0-800W tungsten, 0-600W ballast, 0-500W compact fluorescent; 1/6 hp
@277 VAC.....	0-1200W ballast
Egress Time Delay .....	30 seconds
Environment .....	Indoor use only
Operating Temperature .....	32° to 131°F (0° to 55°C)
Humidity.....	95% RH, non-condensing
Card Slot accepts standard size hotel card keys with dimensions.....	2.125"W x 3.375"H x 0.034"D (53.975mm x 85.725mm x 0.8636mm)
Tools Needed	
Insulated Screwdriver, Wire Strippers	



Santa Clara, CA 95050

## DESCRIPTION

The HS-150 is a line voltage card key switch that operates as a master switch to enable or disable power to single-pole electric branch circuits and loads in a hotel guest room or similar site. When a hotel door entry card key (or the key fob HS-FOB) is inserted in the HS-150 card slot the controlled circuits are energized. When the hotel door entry card key (or HS-FOB) is removed, the controlled circuits will remain energized for 30 seconds more to allow safe egress from the hotel room. After this time delay elapses, they will be de-energized. To restore power to the room (that is, to the controlled circuits and loads), the occupant will need to reinsert the hotel door entry card key into the HS-150 card slot.

### Lighted Card Slot

To help you locate the HS-150 in a dark room, two green LEDs illuminate the card slot where the hotel door entry card key or the key fob HS-FOB should be inserted. When the card or HS-FOB is in the slot, the green LEDs are off.

## INSTALLATION AND WIRING

### WARNING

Disconnect power to the wall switch box by turning OFF the circuit breaker or removing the fuse for the circuit before installing the HS-150, replacing lamps, or doing any electrical work.

Install in compliance with all applicable codes and standards.

1. Make sure that the power has been turned off at the circuit breaker.
2. Strip insulation off the wires to expose their copper cores to the length indicated by the "Strip Gage" shown in Figure 1. Approximately 1/2"
3. Connect wires to the HS-150 flying leads as shown in the wiring diagram (Figure 2).
  - Connect the green or non-insulated (copper) GROUND wire from the circuit to the green terminal on the HS-150.
  - Connect the NEUTRAL wire from the circuit to the white wire on the HS-150.
  - Connect the power wire from the circuit box (HOT/LINE) to the black wire on the HS-150.
  - Connect the power wire to the loads to the red wire on the HS-150.
3. Put the HS-150 in the wall box and secure it to the wall box with the screws provided.
4. Attach the cover plate.
5. Restore power to the circuit.




Figure 1: Strip Gage


## TROUBLESHOOTING

Lighted card slot is OFF; no response from controlled loads in the guest room when card is inserted in slot.

- Make sure the circuit breaker that feeds the HS-150 and hence the controlled guest room loads is on and functioning.
- If the guest room loads are still not energized, turn power off and verify that the HS-150 is wired correctly and that all wire leads are tightly connected.
- If loads still do not respond properly after following troubleshooting, turn OFF power to the circuit and call technical support at 1.800.879.8585.

Lighted card slot is ON; no response from controlled loads in the guest room when card is inserted in slot or removed from it.

- Turn power off and verify that the HS-150 is wired correctly and that all wire leads are tightly connected. Turn power back on.
- If there is still no response from the controlled loads in the guest room, call technical support.

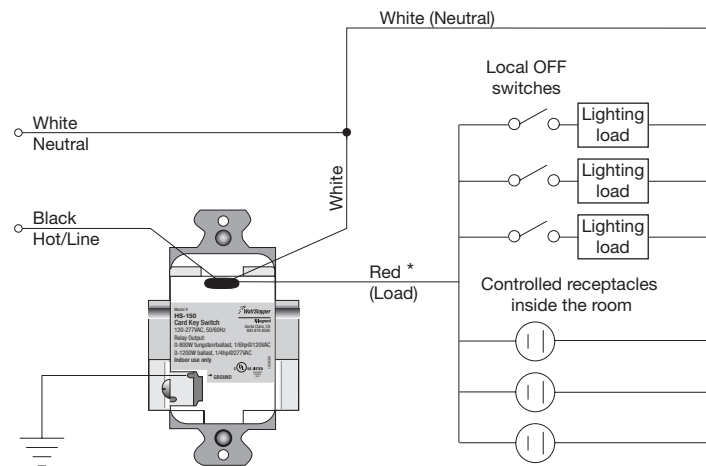

\* Do not exceed the HS-150's maximum load rating.

Figure 2: Line voltage wiring

When controlling multiple circuits in a room, call Technical Support at 800.879.8585 for diagrams.

## ORDERING INFORMATION

Catalog #	Description
HS-150	Line Voltage Card Key Switch; 120-277VAC, 50/60Hz
HS-100	Low Voltage Card Key Switch; 24VDC/VAC
HS-FOB*	Key Fob accessory for use when room access uses a standard key entry or other system without standard size hotel card key
HS-WP**	Cover plate for single-gang box
HS-WPR	Cover plate for triple-gang box with decorator switch option (card slot on the right)
HS-WPL	Cover plate for triple-gang box with decorator switch option (card slot on the left)

Hotel Card Key Switches, Key Fobs and Cover Plates are available in White (-W), Light Almond (-LA), Ivory (-I), Black (-B), and Grey (-G)

\* Not needed when hotel uses card key entry system.

\*\* One HS-WP included with each switch.

## WARRANTY INFORMATION

Watt Stopper/Legrand warrants its products to be free of defects in materials and workmanship for a period of five (5) years. There are no obligations or liabilities on the part of Watt Stopper/Legrand for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.



2800 De La Cruz Boulevard, Santa Clara, CA 95050  
Technical Support: 800.879.8585  
[www.wattstopper.com](http://www.wattstopper.com)  
08362r2 08/2007

Please  
Recycle

