
PS4-11-10WT





Square steel poles with welded tenon included for use with floodlights. Designed for ground mounting. Poles are stocked nationwide for quick shipment. Protective packaging ensures poles arrive at the job site good as new.

Color: Bronze Weight: 101.0 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type:	N/A	Type:	N/A
Watts:	0W	120V:	N/A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	N/A	Input Watts:	0W
Lamp Lumens:	N/A		
Efficacy:	N/A		

Technical Specifications

Listings

CSA Listed:

Suitable for wet locations.

Construction

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover.

Base Plates:

Slotted base plates 36,000 p.s.i.

Shipping Protection:

All poles are shipped in individual corrugated cartons to prevent finish damage.

Color:

Bronze powder coating.

Tenon:

Welded 2 3/8" tenon included.

Height:

10 FT.

Gauge:

11

Wall Thickness:

1/8".

Shaft Size:

4".

Hand Hole Dimensions:

3" x 5".

Bolt Circle:

8 1/2".

Base Dimension:

8".

Weight:

101 lbs.

Anchor Bolt:

Galvanized anchor bolts and galvanized hardware and anchor bolt template. All bolts have a 3" hook.

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available.

Pre-Shipped Anchor Bolts:

Bolts can be pre-shipped upon request for additional freight charge.

MaxEPA's/Max Weights:


70MPH 27.6 ft_/690 lb 80MPH 21.1 ft_/530 lb 90MPH 16.4 ft_/410 lb 100MPH 13.1 ft_/330 lb 110MPH 10.5 ft_/265 lb 120MPH 8.6 ft_/215 lb 130MPH 7.0 ft_/175 lb 140MPH 5.8 ft_/145 lb 150MPH 4.8 ft_/120 lb.

Other

Terms of Sale:

Pole Terms of Sale is available .



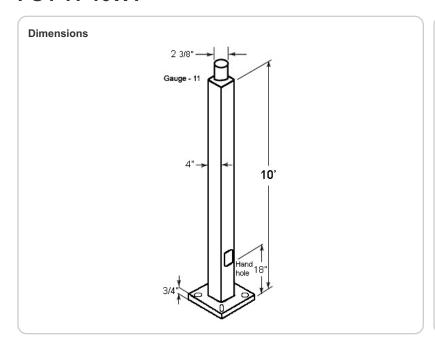

Features

Designed for ground mounting

Heavy duty TGIC polyester coating

Reinforced hand holes with grounding lug and removable cover for easy wiring access

Anchor Bolt Kit includes pole cap and base cover (sold separately)

Custom manufactured for each application