

## SPECIFICATION & FEATURES


### 4-11/16" SQUARE (5S) 1-GANG & 2-GANG DEVICE RINGS FLAT OR DRAWN

#### DESCRIPTION:

Orbit Industries' 4-11/16" Square (5S) 1-Gang and 2-Gang Device Rings are used with 4-11/16" Square (5S) boxes to mount electrical fixtures, switches, and other devices. They are constructed from 16 gauge galvanized steel. Raised rings ranging from 1/4" to 2" accommodate drywall and added wall thicknesses. Orbit Industries' selection includes flat, drawn and tile rings with various types of slots for most devices.

#### CERTIFICATION:

UL file E227970, conforms to UL514A.

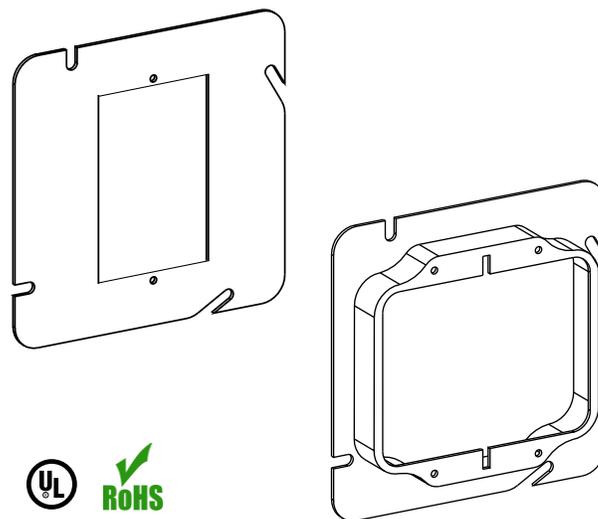

#### FEATURES

- 000: Flat
- 025: Raised 1/4"
- 050: Raised 1/2"
- 058: Raised 5/8"
- 075: Raised 3/4"
- 100: Raised 1"
- 125: Raised 1-1/4"
- 150: Raised 1-1/2"
- 200: Raised 2"

#### DIMENSIONS

Width: 4-11/16"  
Height: 4-11/16"

#### CONFIGURATION DATA

| Catalog No. | Catalog No. | Description   | Gangs | Cu.In | Std. Pkg. |
|-------------|-------------|---------------|-------|-------|-----------|
| 51000       |             | Flat          | 1     | -     | 50        |
| 51025       |             | Raised 1/4"   | 1     | 1.8   | 50        |
| 51050       | 51050T      | Raised 1/2"   | 1     | 3.8   | 50        |
| 51058       |             | Raised 5/8"   | 1     | 4.3   | 50        |
| 51075       | 51075T      | Raised 3/4"   | 1     | 5.5   | 50        |
| 51100       | 51100T      | Raised 1"     | 1     | 7.5   | 25        |
| 51125       | 51125T      | Raised 1-1/4" | 1     | 9.4   | 25        |
| 51150       | 51150T      | Raised 1-1/2" | 1     | 11.2  | 25        |
| 51200       | 51200T      | Raised 2"     | 1     | 14.4  | 25        |
| 52000       |             | Flat          | 2     | -     | 50        |
| 52025       |             | Raised 1/4"   | 2     | 3.0   | 50        |
| 52050       | 52050T      | Raised 1/2"   | 2     | 5.8   | 50        |
| 52058       |             | Raised 5/8"   | 2     | 7.5   | 50        |
| 52075       | 52075T      | Raised 3/4"   | 2     | 8.8   | 50        |
| 52100       | 52100T      | Raised 1"     | 2     | 11.8  | 25        |
| 52125       | 52125T      | Raised 1-1/4" | 2     | 14.5  | 25        |
| 52150       | 52150T      | Raised 1-1/2" | 2     | 15.5  | 25        |
| 52200       | 52200T      | Raised 2"     | 2     | 20.7  | 25        |

