



T5 Standard

F28T5/830 ALTO 40PK

Philips T5 Fluorescent Lamps featuring ALTO® Lamp Technology offer increased energy savings and low toxicity in a slim profile.

Product data

General Information		Color Rendering Index (Min)	
Cap-Base	G5 [G5]		80
Bulb Shape	T5 [16 mm (T5)]	Color Rendering Index (Nom)	82
Life To 50% Failures Preheat (Nom)	24000 h	LLMF 2000 h Rated	96 %
Features	HE Alto® [High Efficiency Alto]	LLMF 4000 h Rated	95 %
System Description	High Efficiency	LLMF 6000 h Rated	94 %
LSF Preheat 2000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF Preheat 4000 h Rated	99 %	LLMF 12000 h Rated	92 %
LSF Preheat 6000 h Rated	99 %	LLMF 16000 h Rated	91 %
LSF Preheat 8000 h Rated	99 %	LLMF 20000 h Rated	90 %
LSF Preheat 16000 h Rated	97 %		
LSF Preheat 20000 h Rated	84 %	Operating and Electrical	
		Power (Rated) (Nom)	27.9 W
		Lamp Current (Nom)	0.170 A
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	Design Temperature (Nom)	35 °C
Initial lumen (Nom)	2900 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	2625 lm	Dimmable	Yes
Color Designation	Warm White (WW)	Mechanical and Housing	
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	104 lm/W	Cap-Base Information	Green [Green Cap]
Chromaticity Coordinate X (Nom)	440		
Chromaticity Coordinate Y (Nom)	403		
Correlated Color Temperature (Nom)	3000 K		
Luminous Efficacy (rated) (Nom)	94 lm/W		
Color Rendering Index (Max)	85		

T5 Standard

Approval and Application


Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg

Product Data

Order product name	28W/830 Min Bipin T5 HE ALTO UNP/40
EAN/UPC - Product	046677230845
Order code	230847

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927990683022
Net Weight (Piece)	104.500 g
ILCOS Code	FDH-28/30/1B-L/P-G5-16/1150

Dimensional drawing

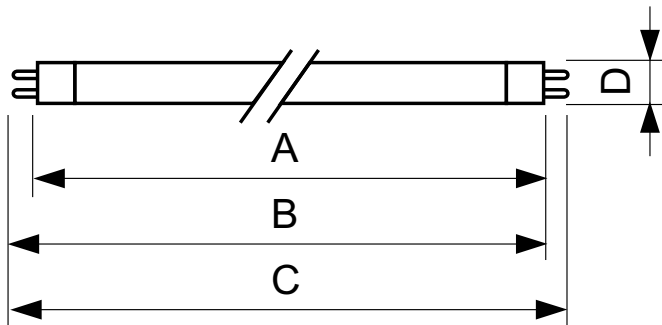

TL5 HE F28T5/830 HE Alto

Product	D	A	B	B	C
28W/830 Min Bipin T5 HE ALTO UNP/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

