



BR/R LED

9BR30/LED/827-22/DIM 120V

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.

PHILIPS

Product data

• General Information

Cap-Base	E26 [Single Contact Medium Screw]
Bulb Shape	BR30 (BR30)
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	9-65W

• Light Technical

Color Code	822-827 [tunable warm white]
Luminous Flux (Nom)	650 lm
Luminous Flux (Rated) (Nom)	650 lm
Color Designation	Soft White
Correlated Color Temperature (Nom)	2200-2700 K
Luminous Efficacy (rated) (Nom)	73 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

• Operating and Electrical

Input Frequency	60 Hz
Power (Rated) (Nom)	9 W
Lamp Current (Nom)	92 mA
Wattage Equivalent	65 W
Starting Time (Max)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s

Power Factor (Nom)	0.8
Voltage (Nom)	120 V

• Temperature

T-Case Maximum (Nom)	76 °C
----------------------	-------

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Bulb Finish	Frosted
-------------	---------


• Approval and Application

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	9 kWh

• Product Data

Order product name	9BR30/LED/827-22/DIM 120V
EAN/UPC - Product	046677457044
Order code	929001155504
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001155504
Net Weight (Piece)	0.001 kg



Dimensional drawing

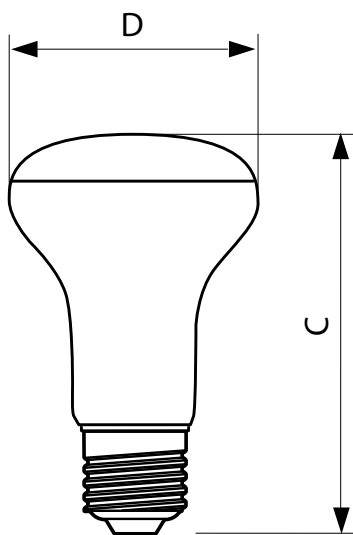

E26 BR30

BR30 G5 120V 9W-65W 650lm 2700K E26 D

Product	D	C
9BR30/LED/827-22/DIM 120V	96 mm	132 mm

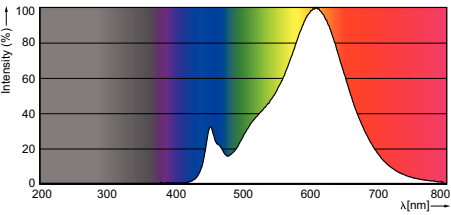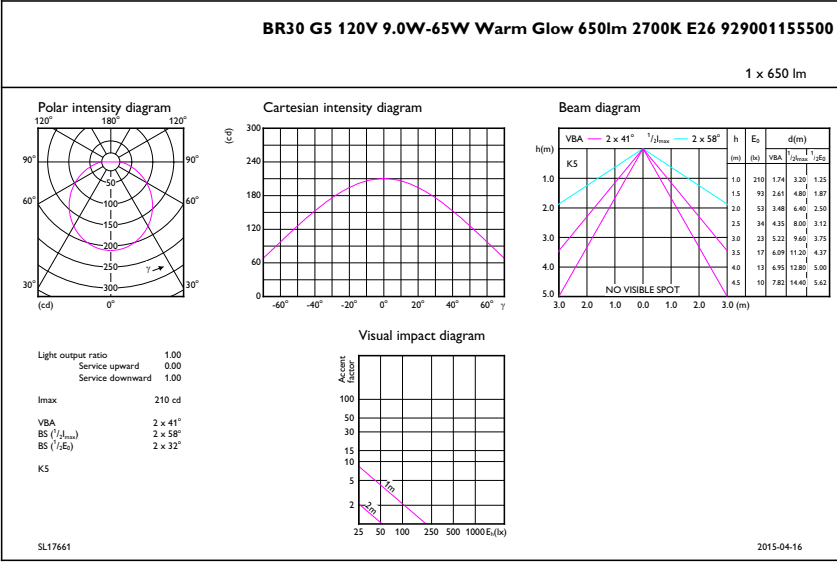

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 11
data subject to change